

PLATE HEATER HIGH PERFORMANCE SELF-LEVELING HEATED

Model #HP102/103



SPECIFICATIONS

- Electrical: 208/220 VAC, 60 Hz, single phase. Six foot grounded 20 amp power cord supplied. NEMA 6-20P plug.
- Construction: The outer unit is constructed of 18 gauge 300 series stainless steel. Inner walls are constructed of .063 high strength aluminum. All sides and lids of unit are insulated with fiberglass insulation.
- Lids: Unique hat channel design requires no gaskets.
- Heating System: Thermostatically controlled, forced air heating system with 3200 watt element.
- Self-Leveling Dispenser: Individual, removable, self-adjusting and all stainless steel construction. Self-lubricating bearings ride over vertical guide rods.
- Casters: Unit is mounted on four 5" diameter swivel casters with non-marking cushion tread, two with swivel-lock and wheel brake.



FOOD SERVICE RESOURCES
5350 McEver Road Suite A
Flowery Branch, GA 30542
Fax: 770-965-6938
1-800-367-4421

PLATE HEATER

HIGH PERFORMANCE

SELF-LEVELING HEATED


Model #HP102/103



Dimensions

Model	Overall Size			Casters		Shipping Weight	Case Cube	Electrical Specifications			Thermostat Range
	W	D	H	Type	Dia.	lbs.	Cu. ft.	Watt	Amp	Volt	
HP102	33 3/8"	23 3/4"	42 3/4"	4 swivel, 2 w/ brake	5"	270	24.0	3200	16.3	208/220 60 Hz	175 to 215 degrees Fahrenheit
HP103	43 7/16"	23 3/4"	42 3/4"	4 swivel, 2 w/ brake	5"	335	31.1	3200	16.3	208/220 60 Hz	175 to 215 degrees Fahrenheit

Dimensions

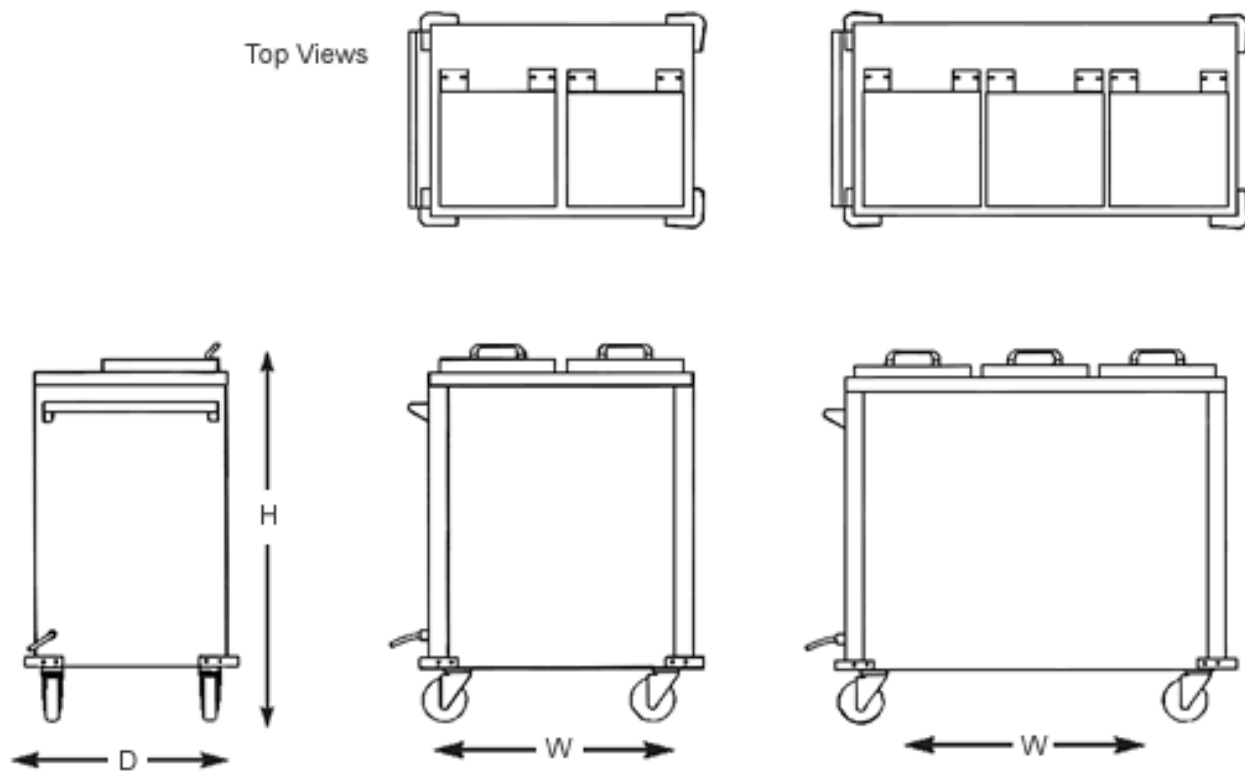

FOOD SERVICE RESOURCES

www.fsrfoodservice.com

800-367-4421